








## Scaffold Castors

- Rated to international scaffold codes.
- All castors have a total locking brake.



WSU150/38

CODE	 (mm)	 kg		 (mm)	Pintle
WSU150/38	150	350kg	Plain	180	38mm Adjustable Pintle
WSU200/38	200	500kg	Plain	250	38mm Adjustable Pintle

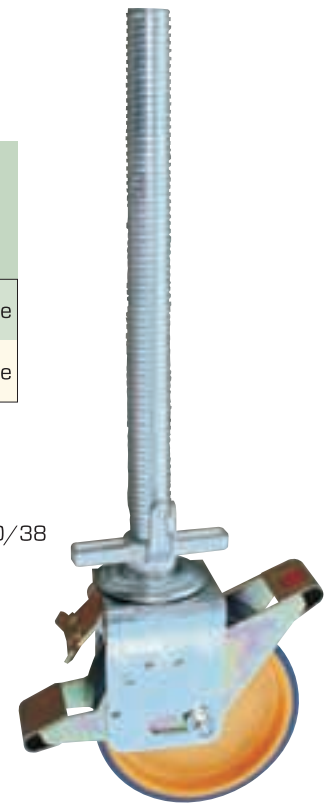

WSU200/38

## Low/High Temperature Castors









- Quality moulded Phenolic wheel - temperature range of - 40°C to +280°C  
Extra high temperature wheels available +400°C (100mm only)
- Self lubricating teflon coated stainless steel bush (100mm only) to reduce squeaking.
- Castor forks available in stainless steel or zinc plated.



MCP100/P



MCP100/F

CODE	 (mm)	 (mm)		 kg		 (mm)	Swivel Fixed	 (mm)	 (mm)
<b>ZINC PLATED</b>									
Suits 8mm bolt									
MCP100/P	100	35	Phenolic	120kg	Teflon Plain	127	S	105 x 80	80 x 60
MCP100/F	100	35	Phenolic	120kg	Teflon Plain	127	F	105 x 80	80 x 60
Suits 10mm bolt									
MHP150/P	150	45	Phenolic	300kg	Plain	190	S	135 x 105	105 x 80
MHP150/F	150	45	Phenolic	300kg	Plain	190	F	135 x 105	105 x 80
<b>STAINLESS STEEL</b>									
Suits 8mm bolt									
MSP100/SP	100	35	Phenolic	120kg	Teflon Plain	127	S	105 x 80	80 x 60
MSP100/SF	100	35	Phenolic	120kg	Teflon Plain	127	F	105 x 80	80 x 60